



BOMAG
FAYAT GROUP

PRODUCT GUIDE

LIGHT EQUIPMENT



Tampers

BT 50	4
BT 60, BT 65	6

Single Direction Vibratory Plates

BVP 10/36	8
BVP 10/30, BVP 12/50 A	10
BVP 18/45	12
BP 25/50	14

Reversible Vibratory Plates

BPR 25/40	16
BPR 35/60	18
BPR 45/45 Gas, BPR 50/55 D	20
BPR 60/65 Gas, BPR 60/65 D	22
BPR 70/70 D	24

Hand-guided Vibratory Rollers

BW 55	26
BW 65	28

Multi-Purpose Compactor

BMP 8500	30
<i>New!</i> BMP 8500 (FL)	32

Tandem Rollers

BW 900-50	34
BW 90 AD-5, BW 100 ADM-5	36
BW 100 SL-5, BW 120 SL-5	38

Single Drum Rollers

BW 124 DH-5, BW 124 PDH-5	40
BW 145 D-5, BW 145 DH-5, BW 145 PDH-5	42
BW 177 D-5, BW 177 DH-5, BW 177 PDH-5	44
BW 211 D-5, BW 211 PD-5	46
BW 211 DH-5, BW 211 PDH-5	48
BW 211 SL-5	50
BW 213 SL-5	52



4-Stroke Tamper BT 50

Fields of application:

Earthwork and asphalt construction.


Pipeline, trench and sewer line construction, backfills, foundations and repair work on asphalt.

Standard Equipment

- ☒ Engine Protection System
 - Protective engine covering
 - Paper air filter system with two stages
 - Automatic oil level control
 - Dual fuel filter system
- ☒ Vibration isolated steering handle
- ☒ Self-cleaning air filter
- ☒ Protective covering
- ☒ Single point lifting device
- ☒ Recoil starter
- ☒ Plastic caster as loading aid
- ☒ Infinitely variable frequency
- ☒ Combination of engine stop/fuel switch
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ h-/ rpm meter
- ☐ Transport device with puncture proof wheels
- ☐ Tamper foot widths (6.3-13in)
- ☐ Tamper foot extensions
- ☐ Service Kit
- ☐ Special Painting
- ☐ Tool kit
- ☐ TOUGH WARRANTY

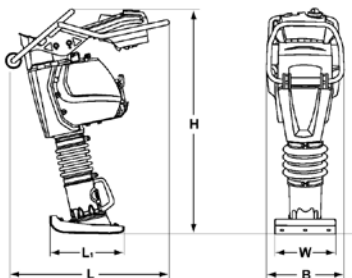

Dimensions in inches

	B	H	L	L1	W
BT 50	13.8	40.6	28.7	13.2	11.0

Technical Data

BOMAG BT 50

Weights

Operating weight CECE	lb	128
Basic weight	lb	126

Dimensions

Working width (tamper plate)	in	11.0
------------------------------------	----	------

Driving Characteristics

Working speed, max	ft/min	65.6
Area Coverage max	sqft/hr	2,971

Drive

Engine manufacturer		Honda
Type		GXR 120
Emission stage		CARB Phase III
Cooling		air
Number of cylinders		1
Performance SAE J 1349	hp	3.8
Fuel		Gasoline
Drive system		mech.
Fuel consump. avg. during operation	gal/h	0.2

Exciter system

Frequency	vpm	600-708
Impact force	lb	3,372
Jumping height	in	2.8

Capacities

Fuel	gal	0.8
------------	-----	-----



4-Stroke Tampers BT 60, BT 65

Fields of application:
Earthwork and asphalt construction.


Pipeline, trench and sewer line construction, backfills,
foundations and repair work on asphalt.

Standard Equipment

- ☒ Engine Protection System
 - Protective engine covering
 - Paper air filter system with two stages
 - Automatic oil level control
 - Dual fuel filter system
- ☒ Vibration isolated steering handle
- ☒ Self-cleaning air filter housing
- ☒ Protective covering
- ☒ Single point lifting device
- ☒ Recoil starter
- ☒ Plastic caster as loading aid
- ☒ Infinitely variable frequency
- ☒ Combination of engine stop/fuel switch
- ☒ h-/ rpm meter
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Transport device with puncture proof wheels
- ☐ Tamper foot widths (6.3-13in)
- ☐ Tamper foot extensions
- ☐ Service Kit
- ☐ Special Painting
- ☐ Tool kit
- ☐ Operator protection contact breaker switch
- ☐ TOUGH WARRANTY

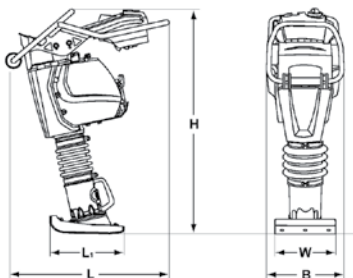

Dimensions in inches

	B	H	L	L1	W
BT 60	13.8	40.6	28.7	13.2	11.0
BT 65	13.8	40.6	28.7	13.2	11.0

Technical Data

BOMAG BT 60

BOMAG BT 65

Weights

Operating weight CECE	lb
Basic weight	lb

128
126

150
148

Dimensions

Working width (tamper plate)	in
------------------------------------	----

11.0

11.0

Driving Characteristics

Working speed, max	ft/min
Area Coverage max	sqft/hr

65.6
2,971

65.6
3,677

Drive

Engine manufacturer	
Type	
Emission stage	
Cooling	
Number of cylinders	
Performance SAE J 1349	hp
Fuel	
Drive system	
Fuel consump. avg. during operation	gal/h

Honda
GXR 120
StageV/CARB P. 3
air
1
3.8
Gasoline
mech.
0.2

Honda
GXR 120
StageV/CARB P. 3
air
1
3.8
Gasoline
mech.
0.2

Exciter system

Frequency	vpm
Impact force	lb
Jumping height	in

600-708
3,372
2.8

600-708
3,822
2.8

Capacities

Fuel	gal
------------	-----

0.8

0.8



Single Direction Vibratory Plate BVP 10/36

Fields of application:

Earthwork, asphalt and paving applications.


Repair work on pipelines, trench construction, hardscape and retaining wall projects

Standard Equipment

- ☒ Vibration isolated steering handle, foldable
- ☒ Detachable steering handle
- ☒ Highly wear-resistant base plate
- ☒ Automatic shutdown at low oil level
- ☒ Recoil starter
- ☒ Single point lifting device
- ☒ Fully protected V-belt
- ☒ Carrying handles
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Sprinkler system (+15.4lb)
- ☐ Transport wheels (+8.8lb)
- ☐ Plastic mat
- ☐ Service Kit
- ☐ Engine protection frame
- ☐ Tool kit
- ☐ TOUGH WARRANTY
- ☐ Comfort guide handle
- ☐ Special painting



Dimensions in inches

	B	H	L	L1	W
BVP 10/36	21.1	36.0	43.9	22.0	14.2

Technical Data

BOMAG BVP 10/36

Weights

Operating weight CECE	lb	183
Basic weight	lb	181

Dimensions

Working width	in	14.2
---------------------	----	------

Driving Characteristics

Working speed, max	ft/min	82.0
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer		Honda
Type		GX120
Emission stage		StageV/CARB P. 3
Cooling		air
Number of cylinders		1
Performance SAE J 1349	hp	3.5
Speed	rpm	3,600
Drive system		mech.
Fuel		Gasoline
Fuel consump. avg. during operation	gal/h	0.2

Exciter system

Frequency	vpm	5,400
Centrifugal force	lb	2,248/495
Amplitude	in	0.054

Capacities

Fuel	gal	0.5
Water	gal	1.8



Single Direction Vibratory Plates BVP 10/30, BVP 12/50 A

Fields of application:

Earthwork, asphalt and paving applications.


Repair work on pipelines, trench construction, hardscape and retaining wall projects.

Standard Equipment

- ☒ Vibration isolated steering handle (BVP 10/30)
- ☒ Detachable steering handle
- ☒ Highly wear-resistant base plate (BVP 10/30)
- ☒ Highly wear-resistant cast-iron base plate (BVP 12/50 A)
- ☒ Automatic shutdown at low oil level (BVP 12/50 A)
- ☒ Recoil starter
- ☒ Single point lifting device
- ☒ Fully protected V-belt
- ☒ Carrying handles
- ☒ 3-2-1 Warranty
- ☒ Sprinkler system (BVP12/50 A)

Optional Equipment

- ☐ Service Kit
- ☐ Plastic mat (BVP 10/30)
- ☐ TOUGH WARRANTY (BVP 12/50 A)
- ☐ Comfort guide handle (BVP 10/30)
- ☐ Special painting

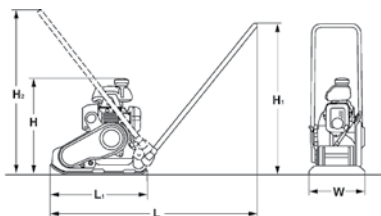

Dimensions in inches

	H	H1	H2	L	L1	W
BVP 10/30	19.3	33.1	36.6	41.7	20	11.8
BVP 12/50 A	26	37.0	32.3	38.2	20.9	19.7

Technical Data

BOMAG BVP 10/30

BOMAG BVP 12/50 A

Weights

Operating weight CECE.....	lb	104	159
Basic weight.....	lb	101	148

Dimensions

Working width.....	in	11.8	19.7
--------------------	----	------	------

Driving Characteristics

Working speed, max	ft/min	82.0	82.0
Max gradeability (dep. on soil con.)	%	30	30

Drive

Engine manufacturer		Honda	Honda
Type.....		GXR120	GX 120
Emission stage		StageV/CARB P. 3	StageV/CARB P. 3
Cooling		air	air
Number of cylinders.....		1	1
Performance SAE J 1349	hp	3.1	3.5
Speed	rpm	3,600	3,600
Drive system.....		mech.	mech.
Fuel		Gasoline	Gasoline
Fuel consump. avg. during operation....	gal/h	0.2	0.2

Exciter system

Frequency.....	vpm	6,000	5,640
Centrifugal force	lb	2,248	2,698
Amplitude	in	0.053	0.043

Capacities

Fuel	gal	0.2	0.5
Water.....	gal	—	1.8



Single Direction Vibratory Plate BVP 18/45

Fields of application:

Earthwork, asphalt and paving applications.


Repair work on pipelines, trench construction, hardscape and retaining wall projects.

Standard Equipment

- ☒ Vibration isolated steering handle, foldable
- ☒ Detachable steering handle
- ☒ Highly wear-resistant base plate
- ☒ Automatic shutdown at low oil level
- ☒ Recoil starter
- ☒ Single point lifting device
- ☒ Fully protected V-belt
- ☒ Carrying handles
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Sprinkler system (+15.4lb)
- ☐ Transport wheels (+8.8lb)
- ☐ Plastic mat
- ☐ Service Kit
- ☐ Tool kit
- ☐ TOUGH WARRANTY
- ☐ Special painting
- ☐ Engine protection frame
- ☐ Comfort guide handle

**Dimensions in inches**

	H	H1	L	L1	W
BVP 18/45	21.1	36.0	43.9	22.0	17.7

Technical Data**BOMAG
BVP 18/45****Weights**

Operating weight CECE	lb	201
Basic weight	lb	198

Dimensions

Working width	in	17.7
---------------------	----	------

Driving Characteristics

Working speed, max	ft/min	82.0
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer		Honda
Type		GX 160
Emission stage		CARB Phase III
Cooling		air
Number of cylinders		1
Performance SAE J 1349	hp	4.8
Speed	rpm	3,600
Drive system		mech.
Fuel		Gasoline
Fuel consump. avg. during operation	gal/h	0.3

Exciter system

Frequency	vpm	5,400
Centrifugal force	lb	4,047/899
Amplitude	in	0.073

Capacities

Fuel	gal	0.8
Water	gal	1.8



Single Direction Vibratory Plate BP 25/50

Fields of application:

Earthwork, asphalt and paving applications.


Repair work on pipelines, trench construction, hardscape and retaining wall projects

Standard Equipment

- ☒ Vibration isolated steering handle, foldable
- ☒ Detachable steering handle
- ☒ Highly wear-resistant base plate
- ☒ Recoil starter
- ☒ Engine protection frame
- ☒ Single point lifting device
- ☒ Fully protected V-belt
- ☒ Carrying handles
- ☒ Protective covering
- ☒ 3-2-1 Warranty
- ☒ Automatic shutdown at low oil level

Optional Equipment

- ☐ Sprinkler system (+22lb)
- ☐ Transport wheels (+8.8lb)
- ☐ Plastic mat
- ☐ Service Kit
- ☐ Special painting
- ☐ TOUGH WARRANTY
- ☐ Comfort guide handle
- ☐ Central comfort guide handle

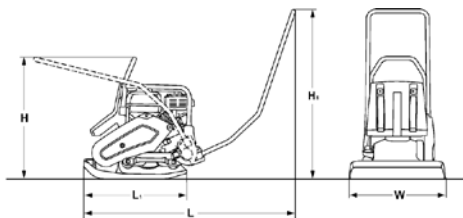

Dimensions in inches

	H	H1	L	L1	W
BP 25/50	25.9	37.9	42.7	21.3	19.7

Technical Data

BOMAG BP 25/50

Weights

Operating weight CECE	lb	238
Basic weight	lb	236

Dimensions

Working width	in	19.7
---------------------	----	------

Driving Characteristics

Working speed, max	ft/min	98.4
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer		Honda
Type		GX 160
Emission stage		Stage V/CARB P. 3
Cooling		air
Number of cylinders		1
Performance ISO 3046	hp	4.8
Speed	rpm	3,600
Drive system		mech.
Fuel		Gasoline
Fuel consump. avg. during operation	gal/h	0.3

Exciter system

Frequency	vpm	5,520
Centrifugal force	lb	5,620/1,259
Amplitude	in	0.069

Capacities

Fuel	gal	0.8
Water	gal	3.6



Reversible Vibratory Plates BPR 25/40

Fields of application:

Earthwork, asphalt and paving applications.


Construction of roads, forestry roads and railroad tracks, backfills, trench and sewer line construction, interlocking paving stones, and foundations.

Standard Equipment

- ☒ Protective engine covering
- ☒ Comfortable control lever
- ☒ Low vibration steering rod
- ☒ Height adjustable steering rod
- ☒ Steering rod lockable in transport and working position
- ☒ Vibration and throttle regulation on the steering rod
- ☒ Highly wear-resistant, powder-coated base plate
- ☒ Fully protected V-belt
- ☒ Recoil starter
- ☒ Back-up drive protection
- ☒ Automatic shutdown at low oil level
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Sprinkler system (+28.7lb)
- ☐ Plastic mat
- ☐ Transport wheels, puncture-proof (+8.8lb)
- ☐ Service Kit
- ☐ Tool kit
- ☐ Special painting

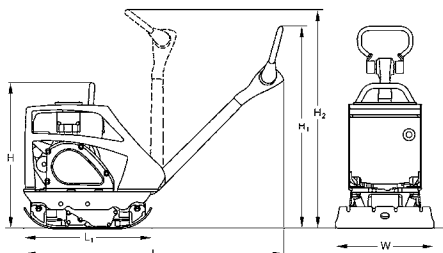

Dimensions in inches

	H	H1	H2	L	L1	W
BPR 25/40	26	36.6	42.5	57.5	25.6	15.7

Technical Data

BOMAG BPR 25/40

Weights

Operating weight CECE	lb	298
Basic weight	lb	291

Dimensions

Working width	in	15.7
Lowest passing height	in	26.0
Min. height w. steering in top position	in	36.6
Max. height w. steering in top position	in	49.2

Driving Characteristics

Working speed, max	ft/min	82.0
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer		Honda
Type		GX 160
Emission stage		Stage V/CARB P.3
Cooling		air
Number of cylinders		1
Performance SAE J 1349	hp	4.8
Speed	rpm	3,600
Drive system		mech.
Fuel		Gasoline
Fuel consump. avg. during operation	gal/h	0.3

Exciter system

Frequency	vpm	5,100
Centrifugal force	lb	5,620
Amplitude	in	0.061

Capacities

Fuel	gal	0.8
Water	gal	3.2



Reversible Vibratory Plates BPR 35/60

Fields of application:

Earthwork, asphalt and paving applications.


Construction of roads, forestry roads and railroad tracks, backfills, trench and sewer line construction, interlocking paving stones, and foundations.

Standard Equipment

- ☒ Protective engine covering
- ☒ Comfortable lever control
- ☒ Height adjustable steering rod
- ☒ Low vibration steering rod
- ☒ Steering rod lockable in transport and working position
- ☒ Vibration and throttle regulation on the steering rod
- ☒ Highly wear-resistant, powder-coated base plate
- ☒ Fully protected V-belt
- ☒ Recoil starter
- ☒ Back-up drive protection
- ☒ Automatic shutdown at low oil level
- ☒ 3-2-1 Warranty
- ☒ Hour meter

- ☐ Transport wheels (+11lb)
- ☐ Plastic mat
- ☐ Service Kit
- ☐ Engine protection hood (+22lb)
- ☐ Electric starter
- ☐ Tool kit
- ☐ Special painting
- ☐ Hour meter

Optional Equipment

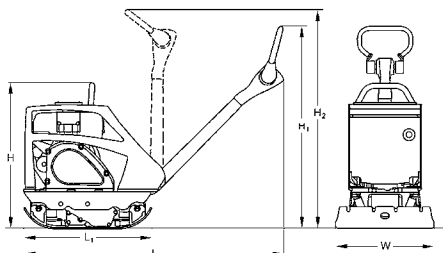

Dimensions in inches

	H	H1	H2	L	L1	W
BPR 35/60	26	40.2	45.3	55	30.0	23.6

Technical Data

BOMAG BRP 35/60

Weights

Operating weight CECE (W)	lb	452
Basic weight	lb	446

Dimensions

Basic working width	in	23.6
Lowest passing height	in	26
Min. height w. steering in top position...	in	40.2
Max. height w. steering in top position ..	in	44.1

Driving Characteristics

Working speed, max	ft/min	88.6
Max. gradeability (dep. on soil con.)	%	32

Drive

Engine manufacturer	Honda
Type	GX 160
Emission stage	Stage V/CARB P.3
Cooling	air
Number of cylinders.....	1
Performance SAE J 3046	hp 4.8
Fuel	Gasoline
Speed	rpm 3,600
Drive system	mech.
Fuel consump. avg. during operation.....	gal/h 0.3

Exciter system

Frequency	vpm	4,800
Centrifugal force	lb	7,868
Amplitude	in	0.051

Capacities

Fuel	gal	0.8
------------	-----	-----



Reversible Vibratory Plates BPR 45/45 Gas, BPR 50/55 D

Fields of application:

Earthwork and paving applications.


Construction of roads, forestry roads and railroad tracks, backfills, trench and sewer line construction, and foundations.

Standard Equipment

- ☒ Engine protection hood
- ☒ Comfortable control lever
- ☒ Low vibration steering rod
- ☒ Height adjustable steering rod
- ☒ Steering rod lockable in transport and working position
- ☒ Vibration and throttle regulation on the steering rod
- ☒ Highly wear-resistant, powder-coated base plate
- ☒ Extension plates (BPR 50/55 D 21.7in)
- ☒ Electric starter (only on BPR50/55 D)
- ☒ Recoil starter
- ☒ Back-up drive protection
- ☒ 3-2-1 Warranty
- ☒ Hour meter

Optional Equipment

- ☐ Plastic mat
- ☐ Service Kit
- ☐ Extension Plates (21.7/25.6/29.5 in)
- ☐ ECONOMIZER (+11 lbs) (BPR 50/55 D)
- ☐ Tool kit
- ☐ Special painting
- ☐ US Version EPA 4 NRTC (BPR 50/55 D:6.8 kW)

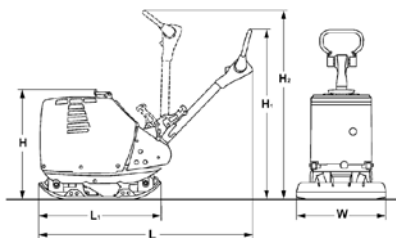

Dimensions in inches

	H	H1	H2	L	L1	W	W1	W2
BPR 45/45 Gas	30.7	38.6	53.1	66.9	35.4	17.7	21.7	25.6
BPR 50/55 D	32.3	38.6	53.1	66.9	35.4	17.7	21.7	29.5

Technical Data

BOMAG BRP 45/45 Gas

BOMAG BRP 50/55 D

Weights

Operating weight CECE (W)	lb	750	860
Operating weight CECE (W1)	lb	783	893
Operating weight CECE (W2)	lb	816	926
Basic weight	lb	743	882

Dimensions

Basic working width	in	17.7	21.7
Working width without extension bars (W)	in	17.7	17.7
Lowest passing height	in	30.7	32.3
Min. height w. steering in top position	in	38.6	38.6
Max. height w. steering in top position	in	48.0	48.0

Driving Characteristics

Working speed, max.	ft/min	91.9	91.9
Max. gradeability (dep. on soil con.)	%	35	35

Drive

Engine manufacturer		Honda	Hatz
Type		GX 270	1B50E
Emission stage.		Stage V/CARB P.3	Stage V
Cooling		air	air
Number of cylinders		1	1
Performance SAE J 1349	hp	8.4	
Performance ISO 3046	hp		9.0
Speed	min-1	3,600	3,000
Drive system		mech.	mech.
Fuel		Gasoline	Diesel
Fuel consump. avg. during operation	gal/h	0.4	0.4

Exciter system

Frequency	vpm	4,140	3,960
Centrifugal force	lb	10,116	11,241
Amplitude	in	0.061	0.073

Capacities

Fuel	gal	1.4	1.3
------------	-----	-----	-----



Reversible Vibratory Plate BPR 60/65 Gas, BPR 60/65 D

Fields of application:

Earthwork and paving applications.


Construction of roads, forestry roads and railroad tracks, backfills, trench and sewer line construction, and foundations.

Standard Equipment

- ☒ Engine protection hood
- ☒ Comfortable control lever
- ☒ Low vibration steering rod
- ☒ Height adjustable steering rod
- ☒ Steering rod lockable in transport and working positions
- ☒ Vibration and throttle regulation on the steering rod
- ☒ Highly wear-resistant, powder-coated base plate
- ☒ Automatic decompression
- ☒ Multi-functional, foldable single-point lifting facility
- ☒ Extension plates (25.6in)
- ☒ Electric starter
- ☒ Recoil starter
- ☒ Back-up drive protection
- ☒ Warning signal at low oil level (BPR 60/65 D)
- ☒ 3-2-1 Warranty
- ☒ Hour meter

Optional Equipment

- ☐ Plastic mat
- ☐ Extension plates (21.7/29.5in)
- ☐ Service Kit
- ☐ ECONOMIZER (+11 lb)
- ☐ Tool kit
- ☐ Special painting
- ☐ US Version EPA 4 NRTC (BPR 60/65 D)

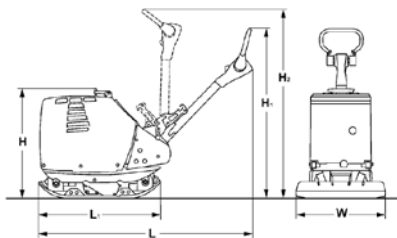

Dimensions in inches

	H	H1	H2	L	L1	W	W1	W2
BPR 60/65 Gas	30.7	38.6	53.1	66.9	35.4	17.7	25.6	29.5
BPR 60/65 D	32.3	38.6	53.1	66.9	35.4	17.7	25.6	29.5

Technical Data

BOMAG BPR 60/65 Gas

BOMAG BPR 60/65 D

Weights

Operating weight CECE (W)	lb	882	970
Basic weight	lb	915	1,003

Dimensions

Basic working width	in	25.6	25.6
Lowest passing height	in	30.7	32.3
Min. height w. steering in top position	in	38.6	38.6
Max. height w. steering in top position	in	48	48

Driving Characteristics

Working speed, max	ft/min	91.9	91.9
Max. gradeability (dep. on soil con.)	%	35	35

Drive

Engine manufacturer		Honda	Hatz
Type		GX 390	1B50E
Emission stage		Stage V/CARB P.3	Stage V
Cooling		air	air
Number of cylinders		1	1
Performance SAE J 1349	hp		9
Performance ISO 3046	hp	11.7	
Speed	min-1	3,600	3,000
Drive system		mech.	mech.
Fuel		Gasoline	Diesel
Fuel consump. avg. during operation	gal/h	0.9	0.4

Exciter system

Frequency	vpm	4,080	4,080
Centrifugal force	lb	13,489	13,489
Amplitude	in	0.077	0.077

Capacities

Fuel	gal	1.6	1.3
------------	-----	-----	-----



Reversible Vibratory Plate BPR 70/70 D

Fields of application:

Earthwork and paving applications.


Construction of roads, forestry roads and railroad tracks, backfills, trench and sewer line construction, and foundations

Standard Equipment

- ☒ Engine protection hood
- ☒ Electric starter
- ☒ Back-up drive protection
- ☒ Height adjustable steering rod
- ☒ Steering rod lockable in transport and working position
- ☒ Vibration and throttle regulation on the steering rod
- ☒ Highly wear-resistant, powder-coated base plate
- ☒ Automatic shutdown at low oil level
- ☒ Multi-functional, foldable single-point lifting facility
- ☒ 12.4 hp engine
- ☒ Extension plates (27.6in)
- ☒ 3-2-1 Warranty
- ☒ Hour meter
- ☒ Service indication lights
- ☒ City mode gas adjustment
- ☒ Comfortable control lever

Optional Equipment

- ☐ Plastic mat
- ☐ Extension plates (33.5in)
- ☐ Service Kit
- ☐ ECONOMIZER (+11lb)
- ☐ Tool kit
- ☐ Special painting
- ☐ Safety crank-handle for emergency starting (+6.6lb)

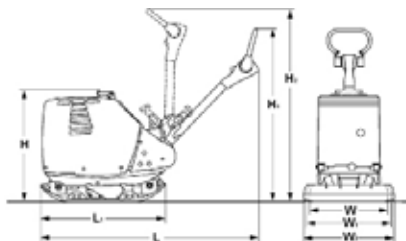

Dimensions in inches

	H	H1	H2	L	L1	W	W1	W2
BPR 70/70 D	34.3	35.4	58.3	73.2	38.6	21.7	27.6	33.5

Technical Data

BOMAG

BPR 70/70 D

Weights

Operating weight CECE (W)	lb	1,257
Operating weight CECE (W1)	lb	1,305
Operating weight CECE (W2)	lb	1,343
Basic weight	lb	1,294

Dimensions

Basic working width	in	27.6
Working width without extension bars (W)	in	21.7
Lowest passing height	in	34.3
Min. height w. steering in top position	in	35.4
Max. height w. steering in top position	in	48

Driving Characteristics

Working speed, max	ft/min	91.9
Max. gradeability (dep. on soil con.)	%	35

Drive

Engine manufacturer		Hatz
Type		1D90E
Emission stage		EPA 4 NRTC
Cooling		air
Number of cylinders		1
Performance ISO 3046	hp	13.5
Speed	rpm	2,700
Drive system		mech.
Fuel		Diesel
Fuel consump. avg. during operation	gal/h	0.5

Exciter system

Frequency	vpm	3,960
Centrifugal force	lb	15,737
Amplitude	in	0.069

Capacities

Fuel	gal	2.6
------------	-----	-----



Hand-guided Single Drum Vibratory Roller BW 55

Fields of application:

Earthwork and asphalt applications.


New construction and repairs of sidewalks, hard shoulders, cycle paths, yards and driveways, playgrounds, tennis and sports grounds.

Standard Equipment

- ☒ Sprinkler system
- ☒ Vibration dampened steering rod
- ☒ Height adjustable steering rod
- ☒ Vibration and throttle regulation on the steering rod
- ☒ Scrapers front and rear
- ☒ Automatic shutdown at low oil level
- ☒ Single point lifting device
- ☒ Safety control
- ☒ Back-up drive protection
- ☒ Support bars front and rear
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Service Kit
- ☐ Tool kit
- ☐ Special painting
- ☐ TOUGH WARRANTY

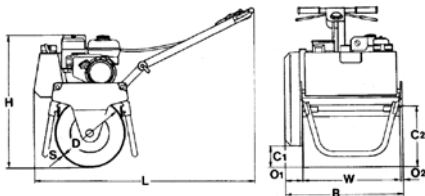

Dimensions in inches

	B	C1	C2	D	H	L	O1	O2	S	W
BW 55	26.7	4.9	13.0	15.7	35.4	43.3	3.9	0.7	0.20	22.0

Technical Data

BOMAG BW 55

Weights

Operating weight CECE	lb	331
Basic weight	lb	311
Static linear load CECE	lb/in	15.0

Dimensions

Working width	in	22.0
---------------------	----	------

Driving Characteristics

Speed (1), forward	mph	0 - 0.7
Speed (1), reverse	mph	0 - 0.7
Speed (2), forward	mph	0 - 1.0
Speed (2), reverse	mph	0 - 1.0
Max. gradeability (without/with vibr.)	%	25/20

Drive

Engine manufacturer		Honda
Type		GX 120
Emission stage		Stage V/CARB P.3
Cooling		air
Number of cylinders		1
Performance SAE J 1349	hp	3.0
Speed	rpm	2,800
Starting device		Recoil starter
Drive system		mech
Fuel		Gasoline
Fuel consump. avg. during operation	gal/h	0.2

Exciter system

Frequency	vpm	4,620
Amplitude	in	0.020
Centrifugal force	lb	2,248/495

Sprinkler system

Type of sprinkling		gravity
--------------------------	--	---------

Capacities

Fuel	gal	0.7
Water	gal	4.2



Hand-guided Double Drum Vibratory Roller BW 65

Fields of application:

Earthwork and asphalt applications.


New construction and repairs of sidewalks, hard shoulders, cycle paths, yards and driveways, playgrounds, tennis and sports grounds.

Standard Equipment

- ☒ Hydrostatic travel and vibration drive
- ☒ Automatic parking brake
- ☒ 2-amplitude oscillator
- ☒ Electric starter
- ☒ Infinitely variable speed control
- ☒ Sprinkler system; Controllable from operator station
- ☒ Vibration dampened steering rod
- ☒ Height adjustable steering rod
- ☒ Vibration and throttle regulation on the steering rod
- ☒ 2 scrapers per drum; With lateral cleaning opening
- ☒ Automatic shutdown at low oil level (BW65)
- ☒ Single point lifting device
- ☒ Automatic decompression
- ☒ Recoil starter
- ☒ Hour meter
- ☒ Safety control
- ☒ Back-up drive protection
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Warning lights
- ☐ Tool kit
- ☐ Special painting
- ☐ Service Kit
- ☐ TOUGH WARRANTY
- ☐ Cleaning rod

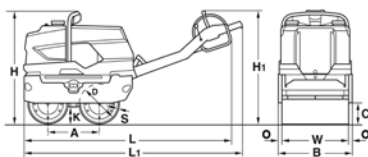

Dimensions in inches

	A	B	C	D	H	H1	K	L	L1	O	S	W
BW 65 Gas	19.7	28.3	8.3	15.7	43.3	66.9	6.1	79.9	83.9	1.4	0.31	25.6

Technical Data

BOMAG BW 65 Gas

Weights

Operating weight CECE	lb	1,587
Basic weight	lb	1,510
Average axle load CECE	lb	794
Average static linear load CECE	lb/in	31

Dimensions

Overall length, min.	in	42
Working width	in	25.6
Max height w. steering in top position	in	66.9

Driving Characteristics

Speed (1), forward	mph	0 - 3.7
Speed (1), reverse	mph	0 - 1.6
Max. gradeability (without/with vibr.)	%	40/35

Drive

Engine manufacturer		Honda
Type		GX 390
Emission stage		StageV/CARB P.3
Cooling		Air
Number of cylinders		1
Performance SAE J 1349	hp	11.0
Speed	rpm	3,000
Fuel		Gas
Drive system		hydrost.
Driven drum		front + rear
Fuel consump. avg. during operation	gal/h	0.6

Brakes

Service brake	hydrost
Parking brake	hydromec. f + r

Exciter system

Vibrating drum		front + rear
Drive system		hydrost. f + r
Frequency	vpm	3,780
Amplitude	in	0.02/0.01
Centrifugal force	lb	5,620/2,810

Sprinkler system

Type of sprinkling	gravity
--------------------------	---------

Capacities

Fuel	gal	1.6
Water	gal	15.9



Multi Purpose Compactor BMP 8500

Fields of application:
Earthwork.


Trench and sewer line construction, backfills and foundation work – wherever high demands are placed on mobility, maneuverability and simple operation under severe soil conditions.

Standard Equipment

- ☒ ECOMODE
- ☒ Drum extensions (24/33.5 in)
- ☒ Hydrostatic articulated steering, maintenance free
- ☒ Combination remote control cable/radio
- ☒ Dual directed-vibration system
- ☒ Two travel speed ranges
- ☒ 2 amplitudes
- ☒ Intelligent Vibration Control (IVC)
- ☒ Electric starter
- ☒ BOMAG Operator Safety System
- ☒ 2 scrapers per drum
- ☒ Battery disconnect switch
- ☒ Automatic shutdown at low oil level
- ☒ Automatic engine shut down at a lateral tipping angle of 45°
- ☒ Full prot. hoods made of impact-resistant compound material
- ☒ Single point lifting device
- ☒ Lockable engine cover and dash board
- ☒ Easy Service Concept
 - Diagnostic module with fault code display
 - Hour meter
 - Foldable full protection hood
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Environmentally compliant hydraulic oil
- ☐ Smooth drum (-99.2lb Amplitude 0.06/0.03in)
- ☐ Mobile quick charger
- ☐ Scraper extensions (24/33.5in)
- ☐ Service Kit
- ☐ ECONOMIZER
- ☐ Special painting
- ☐ TOUGH WARRANTY

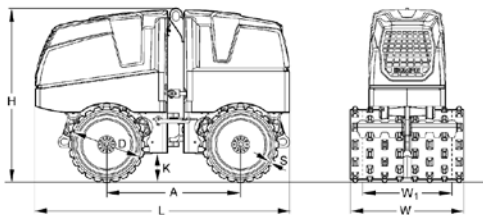

Dimensions in inches

	A	D	H	K	L	S	W	W1
BMP 8500	39.4	20.5	50.2	7.8	74.7	0.63	33.5	24.0

Technical Data

BOMAG BMP 8500

Weights

Operating weight CECE	lb	3,516
Basic weight	lb	3,494
Average axle load CECE	lb	1,758

Dimensions

Working width	in	33.5
---------------------	----	------

Driving Characteristics

Speed (1), forward	mph	0.7
Speed (1), reverse	mph	0.7
Speed (2), forward	mph	1.8
Speed (2), reverse	mph	1.8
Max. gradeability (without/with vibr.)	%	55/45

Drive

Engine manufacturer		Kubota
Type		KDW 1003
Emission stage		Stage V/TIER 4f
Cooling		water
Number of cylinders		3
Performance ISO 3046	hp	17.2
Speed	rpm	2,600
Fuel		Diesel
Drive system		hydrost.
Driven drum		4
Fuel consump. avg. during operation	gal/h	0.8

Brakes

Service brake	hydrost.
Parking brake	hydromec.

Exciter system

Vibrating drum		front + rear
Drive system		hydraulic
Frequency	vpm	2,520/2,520
Amplitude	in	0.044/0.022
Centrifugal force	lb	16,186/8,093

Capacities

Fuel	gal	6.3
------------	-----	-----

New!



Multi Purpose Compactor BMP 8500 FL

Fields of application:
Earthwork.


Trench and sewer line construction, backfills and foundation work – wherever high demands are placed on mobility, maneuverability and simple operation under severe soil conditions.

Standard Equipment

- ☒ ECOMODE
- ☒ Drum extensions (24/33.5 in)
- ☒ Hydrostatic articulated steering, maintenance free
- ☒ 2 batteries in the remote control
- ☒ LED indicators on the remote control
- ☒ Fuse tester
- ☒ Flashing beacon
- ☒ Dual directed-vibration system
- ☒ Two travel speed ranges
- ☒ 2 amplitudes
- ☒ Intelligent Vibration Control (IVC)
- ☒ Electric starter
- ☒ BOMAG Operator Safety System (BOSS)
- ☒ 2 scrapers per drum
- ☒ Battery disconnect switch
- ☒ Automatic shutdown at low oil level
- ☒ Automatic engine shut down at a lateral tipping angle of 40°
- ☒ Single point lifting device
- ☒ Lockable engine cover and dashboard
- ☒ Easy service concept
 - Diagnostic module with fault code display
 - Hour meter
 - Full Prot. hoods made of impact resistant compound material
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Environmentally compliant hydraulic oil
- ☐ Smooth drum (-99.2lb Amplitude 0.06/0.03in)
- ☐ Special painting
- ☐ Charger
- ☐ Fuel level indicator
- ☐ Scraper 24/33.5in
- ☐ Service kit
- ☐ ECONOMIZER
- ☐ TOUGH WARRANTY

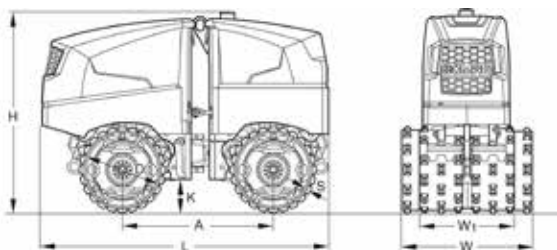

Dimensions in inches

	A	D	H	K	L	S	W	W1
BMP 8500	39.4	20.5	52.5	7.8	74.7	0.63	33.5	24.0

Technical Data

**BOMAG
BMP 8500****Weights**

Operating weight CECE	lb	3,516
Basic weight	lb	3,494
Average axle load CECE	lb	1,758

Driving Characteristics

Speed (1), forward	mph	0.7
Speed (1), reverse	mph	0.7
Speed (2), forward	mph	1.8
Speed (2), reverse	mph	1.8
Max. gradeability (without/with vibr.)	%	55/45

Drive

Engine manufacturer		Kubota
Type		D 1005
Emission stage		Stage V/TIER 4f
Cooling		water
Number of cylinders		3
Performance ISO 3046	hp	19.4
Speed	rpm	2,600
Fuel		Diesel
Drive system		hydrost.
Driven drum		4
Fuel consump. avg. during operation	gal/h	0.8

Brakes

Service brake	hydrost.
Parking brake	hydromec.

Exciter system

Vibrating drum		front + rear
Drive system		hydraulic
Frequency	vpm	2,520/2,520
Amplitude	in	0.046/0.024
Centrifugal force	lb	16,186/8,093

Capacities

Fuel	gal	6.3
------------	-----	-----



Light Tandem Rollers <5 Tons BW 900-50

Fields of application:

Earthwork and asphalt applications.


New construction and repair work for medium and small scale construction projects, on parking lots, sidewalks, cycle paths, playing fields and sports grounds as well as rolling of joints in road construction.

Standard Equipment

- ☒ Foldable ROPS
- ☒ Hydrostatic travel and vibration drive
- ☒ Travel drive in series
- ☒ Front drum vibration
- ☒ Vibration control in travel lever
- ☒ Maintenance Free Oscillating Artic. Center Joint
- ☒ Hydrostatic articulated steering
- ☒ Mechanical parking brake
- ☒ 2 scrapers per drum
- ☒ Plastic water tank
- ☒ Pressure sprinkler system
- ☒ Hour meter
- ☒ Low fuel level indicator
- ☒ Control and warning indicator lights
- ☒ Automatic shutdown at low oil level
- ☒ Lockable anti-vandal dashboard protection
- ☒ Seat belt
- ☒ Single point lifting device
- ☒ Transport lashing and lifting points front/rear
- ☒ Lockable engine cover
- ☒ Emergency engine shut down
- ☒ Corrosion and weather protected ignition switch
- ☒ Back-up alarm

Optional Equipment

- ☐ Working lights front and rear
- ☐ Rotary beacon

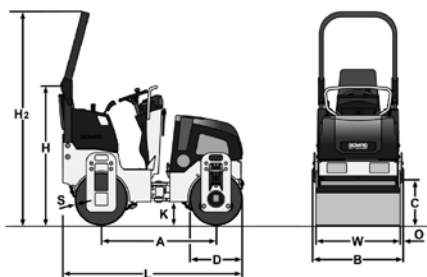

Dimensions in inches

	A	B	C	D	H	H2	K	L	O	S	W
BW 900-50	48.1	37.8	17.7	22.0	68.0	90.2	9.8	77.4	1.2	0.31	35.4

Technical Data

BOMAG BW 900-50

Weights

Operating weight CECE	lb	2,646
Average axle load CECE	lb	1,321
Average static linear load CECE	lb/in	37.3

Dimensions

Overall length, min.	in	35.4
Track radius, inner.	in	64.8

Driving Characteristics

Working speed with vibration	mph	0 - 2.5
Max travel speed	mph	0 - 5.4
Max. gradeability (without/with vibr.)	%	40/30

Drive

Engine manufacturer		Honda
Type		GX 630
Emission stage		TIER 4f
Cooling		air
Number of cylinders		2
Performance SAE J 1349	hp	20.0
Speed	rpm	3,300
Electric equipment	V	12
Drive system		hydropst.
Driven drum		2

Brakes

Service brake		hydropst.
Parking brake		mech.

Steering

Steering system		oscil artic.
Steering method		hydropst
Steering angle +/-	deg	33
Oscillating angle +/-	deg	6

Exciter system

Vibrating drum		front
Drive system		hydropst.
Frequency	vpm	4,200
Amplitude	in	0.020
Centrifugal force	lb	3,372

Sprinkler system

Type of sprinkling		pressure
--------------------------	--	----------

Capacities

Fuel	gal	7.1
Water	gal	36.2



Light Tandem Rollers <5 Tons BW 90 AD-5, BW 100 ADM-5

Fields of application:

Earthwork and asphalt applications.


New construction and repair work for medium and small scale construction projects, on parking lots, sidewalks, cycle paths, playing fields and sports grounds as well as rolling of joints in road construction.

Standard Equipment

- ☒ Hydrostatic travel and vibration drive
- ☒ Travel drive in series
- ☒ 2 scrapers per drum, spring loaded and tiltable
- ☒ Pressure sprinkler system with interval switch
- ☒ Multi-function travel lever
- ☒ Multi-function display incl. operating hour meter
- ☒ Water level
- ☒ Emergency STOP
- ☒ Individual control, vibration
- ☒ Intelligent Vibration Control (IVC)
- ☒ Integrated storage compartment
- ☒ Adjustable operator's seat
- ☒ Operator presence switch
- ☒ Vandalism protection
- ☒ 12V socket
- ☒ Working lights front and rear
- ☒ Back-up alarm
- ☒ Lashing eyes, galvanized
- ☒ Single point lifting device
- ☒ Lockable engine hood made of composite material

Optional Equipment

- ☐ Double travel lever
- ☐ ECONOMIZER with asphalt temperature display
- ☐ BOMAG TELEMATIC
- ☐ Theft protection
- ☐ Indicator and hazard lights
- ☐ Rotary beacon
- ☐ Battery disconnect switch
- ☐ Foldable ROPS
- ☐ ROPS with safety belt
- ☐ Sunroof, foldable with ROPS
- ☐ Temperature display
- ☐ Optional lighting on ROPS
- ☐ Environmentally compliant hydraulic oil
- ☐ Special painting
- ☐ Edge cutter
- ☐ ECOSTOP
- ☐ Outside mirrors
- ☐ Antifreeze intake
- ☐ Tablet holder set
- ☐ JOBLINK measuring technology interface
- ☐ JOBLINK Bluetooth adapter
- ☐ BOMAP GPS antenna holder

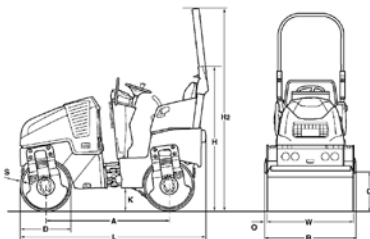

Dimensions in inches

	A	B	C	D	H	H2
BW 90 AD-5	58.4	37.6	17.0	22.8	64.1	90.7
BW 100 ADM-5	58.4	41.6	17.0	22.8	64.1	90.7
	K	L	O	S	W	
BW 90 AD-5	10.0	86.4	1.1	0.47	35.4	
BW 100 ADM-5	10.0	86.4	1.1	0.47	39.4	

Technical Data

Weights

Operating weight CECE	lb	3,527	3,748
Average static linear load CECE	lb/in	49.8	47.6
Gross weight.....	lb	4,189	4,189

Dimensions

Working width.....	in	35.4	39.4
Track radius, inner	in	79.9	78.0

Driving Characteristics

Speed.....	mph	0 - 6.2	0 - 6.2
Working speed with vibration.....	mph	0 - 6.2	0 - 6.2
Max. gradeability without/with vibr.....	%	40/30	40/30

Drive

Engine manufacturer		Kubota	Kubota
Type		D 902	D 902
Emission stage.		TIER 4f	TIER 4f
Cooling.		water	water
Number of cylinders.....		3	3
Performance ISO 14396.....	kW	15.1	15.1
Performance SAE J 1995	hp	20.2	20.2
Speed.....	rpm	3,000	3,000
Speed adjustment 1	rpm	2,100	2,100
Speed adjustment 2.....	rpm	3,000	3,000
Electric equipment.....	V	12	12
Driven drum.....		front + rear	front + rear

Brakes

Service brakes.....		hydropneum.	hydropneum.
Parking brake		hydropneum.	hydropneum.

Steering

Steering system.....		oscil. artic.	oscil. artic.
Steering method		hydropneum.	hydropneum.
Steering / oscillating angle +/-.....	deg	33/8	33/8
Crab walk		0 - 50	0 - 50

Exciter system

Vibrating drum.....		front + rear	front + rear
Drive system.....		hydropneum.	hydropneum.
Frequency.....	vpm	2,520/3,780	2,520/3,780
Amplitude	in	0.020	0.016
Centrifugal force	lb	1,799/3,822	1,796/3,867

Sprinkler system

Type of sprinkling		pressure	pressure
--------------------------	--	----------	----------

Capacities

Fuel.....	gal	7.9	7.9
Water.....	gal	26.4	26.4



Light Tandem Rollers <5 Tons BW 100 SL-5, BW 120 SL-5

Fields of application:

Earthwork and asphalt applications.


New construction and repair work for medium and small scale construction projects, on parking lots, sidewalks, cycle paths, playing fields and sports grounds as well as rolling of joints in road construction.

Standard Equipment

- ☒ Hydrostatic travel and vibration drive
- ☒ Travel drive in series
- ☒ 2 scrapers per drum, spring loaded and tiltable
- ☒ Pressure sprinkler system with interval switch
- ☒ Multi-function travel lever
- ☒ Multi-function display incl. operating hour meter
- ☒ Water level
- ☒ Emergency STOP
- ☒ Individual control, vibration
- ☒ Intelligent Vibration Control (IVC)
- ☒ Integrated stowage compartment
- ☒ Adjustable operator's seat
- ☒ Seat contact switch
- ☒ Vandalism protection
- ☒ 12V socket
- ☒ Working lights front and rear
- ☒ Back-up alarm
- ☒ Lashing eyes, galvanized
- ☒ Single point lifting device
- ☒ Lockable engine hood made of composite material
- ☒ Foldable ROPS incl. seat belt
- ☒ Sliding seat incl. double travel lever

Optional Equipment

- ☐ Sun roof, foldable with ROPS
- ☐ ECONOMIZER with asphalt temperature display
- ☐ BOMAG TELEMATIC
- ☐ Indicator and hazard lights
- ☐ Rotary beacon
- ☐ Battery disconnect switch
- ☐ Theft protection
- ☐ Pointer
- ☐ Special painting
- ☐ ECOSTOP
- ☐ Antifreeze intake
- ☐ Tablet holder set
- ☐ JOBLINK measuring technology interface
- ☐ JOBLINK Bluetooth adapter
- ☐ BOMAP GPS antenna holder

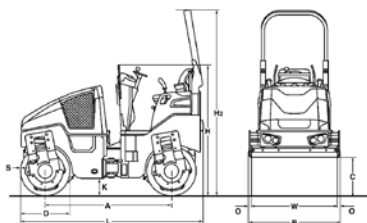

Dimensions in inches

	A	B	C	D	H	H2
BW 100 SL-5	69.0	42.2	20.6	27.6	71.2	101.1
BW 120 SL-5	69.0	50.1	20.6	27.6	71.2	101.1
	K	L	O	S	W	
BW 100 SL-5	10.0	99.6	1.4	0.39	39.4	
BW 120 SL-5	10.0	99.6	1.4	0.39	47.2	

Technical Data

BOMAG

BW 100 SL-5

BOMAG

BW 120 SL-5

Weights

Operating weight w. ROPS CECE	lb	5,181	5,512
Average static linear load CECE	lb/in	65.8	58.3
Grossweight	lb	6,173	6,393

Dimensions

Working width.....	in	39.4	47.2
Track radius, inner.....	in	100.4	96.5

Driving Characteristics

Speed.....	mph	0 - 5.6	0 - 5.6
Working speed with vibration.....	mph	0 - 3.1	0 - 3.1
Max. gradeability without/with vibr.....	%	40/30	40/30

Drive

Engine manufacturer		Kubota	Kubota
Type		D 1703 DI	D 1703 DI
Emission stage		TIER 4f	TIER 4f
Cooling.....		water	water
Number of cylinders.....		3	3
Performance ISO 14396.....	kW	18.5	18.5
Performance SAE J 1995.....	hp	24.8	24.8
Speed.....	rpm	2,200	2,200
Electric equipment.....	V	12	12
Driven drum.....		front + rear	front + rear

Brakes

Service brakes.....		hydropst.	hydropst.
Parking brake		hydromec.	hydromec.

Steering

Steering system.....		oscil. artic.	oscil. artic.
Steering method		hydropst.	hydropst.
Steering / oscillating angle +/-.....	deg	32/10	32/10
Crab walk		0 - 50	0 - 50

Exciter system

Vibrating drum.....		front + rear	front + rear
Drive system.....		hydropst.	hydropst.
Frequency.....	vpm	4,320	4,320
Amplitude.....	in	0.020	0.020
Centrifugal force.....	lb	7,644	8,992

Sprinkler system

Type of sprinkling		pressure	pressure
--------------------------	--	----------	----------

Capacities

Fuel.....	gal	9.6	9.6
Water.....	gal	43.6	43.6



Single Drum Rollers <5 Tons BW 124 DH-5, BW 124 PDH-5

Fields of application:


Built for medium compaction duties in road construction, car parks, trenches and backfill. D-series models are suitable for granular materials (sand, gravel, crushed rock), semi-cohesive soils and hydraulically bound materials. PD-series models are primarily used on cohesive soils with high water contents. All BW 124 models have good climbing performance with high-torque drive systems. With its high traction, the BW 124 is ideal for use with a dozer blade transforming the BW 124 into an effective combination unit for spreading and compaction.

Standard Equipment

- ☒ Hydrostatic travel and vibration drive
- ☒ Double pump system for travel drive
- ☒ 2 Spring accumulator brakes
- ☒ No-spin differential lock
- ☒ Hydrostatic articulated steering
- ☒ Contact scrapers
- ☒ Operating/Control Equipment
 - Hour meter
 - Charge control
 - Parking brake
 - Engine oil pressure
 - Engine temperature
 - Air cleaner pollution
 - Fuel level indicator
- ☒ Warning horn
- ☒ Transport lashing and lifting points front/rear
- ☒ Lockable anti-vandal dashboard protection
- ☒ Back-up alarm
- ☒ Emergency stop button
- ☒ ROPS/FOPS with safety belt
- ☒ Seat contact switch
- ☒ Battery disconnect switch
- ☒ Working lights
- ☒ BOMAG TELEMATIC

Optional Equipment

- ☐ ECONOMIZER
- ☐ Working lights
- ☐ Rear windscreen
- ☐ Dozer blade
- ☐ Rotary beacon
- ☐ Comfort package
- ☐ Smooth drum shell

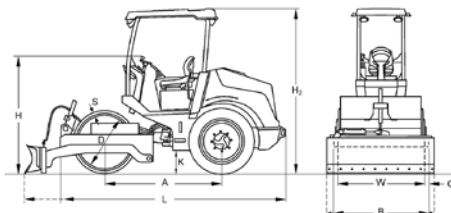

Dimensions in inches

	A	B	D	H	H2	K	L
BW 124 DH-5	71.5	51.6	37.8	72.8	99.2	12.6	138.6
BW 124 PDH-5	71.5	51.6	37.8	72.8	99.2	12.6	138.6
	O	S	W				
BW 124 DH-5	2.2	0.59	47.2				
BW 124 PDH-5	2.2	0.59	47.2				

Technical Data

BOMAG BW 124 DH-5

BOMAG BW 124 PDH-5

Weights

Gross weight.....	lb	8,708	8,819
Operating weight CECE	lb	7,275	7,474
Axle load, drum / wheels CECE	lb	3,483/3,814	3,527/3,946
Static linear load CECE.....	lb/in	73.7	—

Dimensions

Working width.....	in	47.2	47.2
Track radius, inner	in	89.0	89.0

Driving Characteristics

Speed	mph	0 - 5.6	0 - 5.6
Max. gradeability without/with vibr.....	%	55/55	55/55

Drive

Engine manufacturer		Kubota	Kubota
Type		V2403	V2403
Emission stage		TIER 4f	TIER 4f
Exhaust gas aftertreatment.....		DPF	DPF
Cooling		water	water
Number of cylinders.....		4	4
Performance ISO 3046.....	hp	45.6	45.6
Performance SAE J 1995.....	hp	46.0	46.0
Speed	rpm	2,400	2,000
Fuel		Diesel	Diesel
Electric equipment.....	V	12	12
Drive system.....		hydrost.	hydrost.
Drum driven.....		standard	standard

Drums and Tires

Tire size		9.5-24 4PR	9.5-24 4PR
-----------------	--	------------	------------

Brakes

Service brakes.....		hydrost.	hydrost.
Parking brake		hydromec.	hydromec.

Steering

Steering system.....		oscil. artic.	oscil. artic.
Steering method		hydrost.	hydrost.
Steering / oscillating angle +/-.....	deg	35/12	35/12

Exciter system

Drive system.....		hydrost.	hydrost.
Frequency.....	vpm	2,460	2,460
Amplitude	in	0.067/0.033	0.063
Centrifugal force	lb	19,109/9,667	19,109

Capacities

Fuel	gal	15.9	15.9
------------	-----	------	------



Single Drum Rollers <5 Tons

BW 145 D-5, BW 145 DH-5, BW 145 PDH-5

Fields of application:


Built for medium compaction duties in road construction, car parks, trenches and backfill. D-series models are suitable for granular materials (sand, gravel, crushed rock), semi-cohesive soils and hydraulically bound materials. PD-series models are primarily used on cohesive soils with high water contents. H-series models have good climbing performance and high-torque drive systems.

Standard Equipment

- ☒ BOMAG ECOMODE
- ☒ Double pump system for travel drive (DH/PDH)
- ☒ Self locking differential
- ☒ Rear axle with twin spring accumulator brakes
- ☒ Hydrostatic travel and vibration drive
- ☒ Hydrostatic articulated steering
- ☒ Articulated joint lock
- ☒ Warning, information and operation displays
- ☒ Single lever control for travel and vibration
- ☒ Emergency STOP
- ☒ Warning horn
- ☒ Back-up warning system
- ☒ 1 Scraper (D/DH)
- ☒ 2 Scrapers (PDH)
- ☒ Tractor tires (PDH)
- ☒ BOMAG TELEMATIC

Optional Equipment

- ☐ ROPS cabin with seat belts
- ☐ ROPS/FOPS with safety belt
- ☐ Indicator and hazard lights
- ☐ Rotary beacon
- ☐ Rearview camera
- ☐ Air conditioning
- ☐ Sliding window
- ☐ Radio (Bluetooth)
- ☐ BOMAG ECOSTOP
- ☐ ECONOMIZER
- ☐ TERRAMETER
- ☐ Printer for TERRAMETER
- ☐ Special painting
- ☐ Reversing alarm buzzer with broadband audio
- ☐ Padfoot segment kit (D/DH)
- ☐ 2 Contact scrapers (D/DH)
- ☐ Dozer Blade blade (PDH)
- ☐ Comfort package
- ☐ LED Working lights (Cabin)

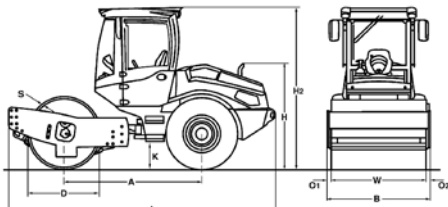

Dimensions in inches

	A	B	D	H	H2	K
BW 145 D-5	88.6	61.4	41.7	61.8	107.1	12.6
BW 145 DH-5	88.6	61.4	41.7	61.8	107.1	12.6
BW 145 PDH-5	88.6	61.4	41.7	61.8	107.1	12.6
	L	O1	O2	S	W	
BW 145 D-5	171.9	2.6	2.6	0.79	56.1	
BW 145 DH-5	171.9	2.6	2.6	0.79	56.1	
BW 145 PDH-5	171.9	2.6	2.6	0.59	56.1	

Technical Data

BOMAG

BOMAG

BOMAG

BW 145 D-5

BW 145 DH-5

BW 145 PDH-5

Weights

Gross weight.....	lb	12,346	13,228	12,346
Operating weight CECE w. ROPS cabin	lb	10,472	10,626	11,177
Axle load, drum CECE	lb	5,490	5,556	6,107
Axle load, Wheels CECE.....	lb	4,982	5,071	5,071
Static linear load.....	lb/in	97.8	99.0	

Dimensions

Working width.....	in	56.1	56.1	56.1
Track radius, inner.....	in	113.8	113.8	113.8

Driving Characteristics

Speed (1).....	mph	0 - 2.5	0 - 6.2	0 - 6.2
Speed (2).....	mph	0 - 2.8		
Speed (3).....	mph	0 - 4.0		
Speed (4).....	mph	0 - 5.6		
Max gradeability wo/with vibr.....	%	51/48	64/59	64/59

Drive

Engine manufacturer		Kubota	Kubota	Kubota
Type		V3307 CR-T	V3307 CR-T	V3307 CR-T
Emission stage		TIER 4f	TIER 4f	TIER 4f
Exhaust gas aftertreatment.....		DOC+DPF	DOC+DPF	DOC+DPF
Cooling		water	water	water
Number of cylinders.....		4	4	4
Performance ISO 3046.....	hp	74.3	74.3	74.3
Performance SAE J 1995	hp	75.0	75.0	75.0
Speed	rpm	2,400	2,400	2,400
Fuel		Diesel	Diesel	Diesel
Electric equipment.....	V	12	12	12
Drive system.....		hydrop.	hydrop.	hydrop.
Drum driven.....		standard	standard	standard

Drums and Tires

Tire size.....		12.5-20 12PR	12.5-20 12PR	12.4-24/8PR
----------------	--	--------------	--------------	-------------

Brakes

Service brake		hydrop.	hydrop.	hydrop.
Parking brake		hydrop.	hydrop.	hydrop.

Steering

Steering system.....		oscil. artic.	oscil. artic.	oscil. artic.
Steering method		hydrop.	hydrop.	hydrop.
Steering/oscillating angle+/-	deg	35/12	35/12	35/12

Exciter system

Drive system.....		hydrop.	hydrop.	hydrop.
Frequency.....	vpm	1,860/2,100	1,860/2,100	1,860/2,100
Amplitude	in	0.067/0.032	0.067/0.032	0.057/0.028
Centrifugal force.....	lb	17,985/12,589	17,985/12,589	17,985/12,589
Centrifugal force.....	t	9/6.3	9/6.3	9/6.3

Capacities

Fuel	gal	29.1	29.1	29.1
------------	-----	------	------	------

Technical modifications reserved. Machines may be shown with options.



Single Drum Rollers <5 Tons BW 177 D-5, BW 177 DH-5, BW 177 PDH-5

Fields of application:


Built for medium compaction duties in road construction, car parks, trenches and backfill. D-series models are suitable for granular materials (sand, gravel, crushed rock), semi-cohesive soils and hydraulically bound materials. PD-series models are primarily used on cohesive soils with high water content. H-series models have good climbing performance and high-torque drive systems.

Standard Equipment

- ☒ BOMAG ECOMODE
- ☒ Double pump system for travel drive (DH/PDH)
- ☒ Self locking differential
- ☒ Rear axle with twin spring accumulator breaks
- ☒ Hydrostatic travel and vibration drive
- ☒ Hydrostatic articulated steering
- ☒ Articulated joint lock
- ☒ Warning, information and operation displays
- ☒ Single lever control for travel and vibration
- ☒ Back-up warning system
- ☒ 2 contact scrapers, plastic

Optional Equipment

- ☐ ROPS cabin with seat belts
- ☐ ROPS/FOPS with safety belt
- ☐ Tractor tires (D/DH)
- ☐ Indicator and hazard lights
- ☐ Rotary beacon
- ☐ Rearview camera
- ☐ Air conditioning
- ☐ Adjustable steering column
- ☐ Sliding window
- ☐ Radio (Bluetooth)
- ☐ BOMAG ECOSTOP
- ☐ ECONOMIZER
- ☐ TERRAMETER
- ☐ Printer for TERRAMETER
- ☐ BOMAG TELEMATIC
- ☐ Special painting
- ☐ BCM 05 Documentation system
- ☐ Reversing alarm buzzer with broadband audio
- ☐ Padfoot segment kit (D/DH)
- ☐ Blade (DH/PDH)
- ☐ Environmentally compliant hydraulic oil
- ☐ Measuring and machine data interface for third-party suppliers
- ☐ LED Working lights (Cabin)

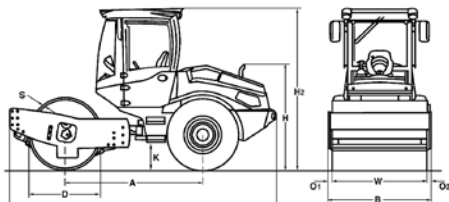

Dimensions in inches

	A	B	D	H	H2	K
BW 145 D-5	92.5	71.7	48.4	68.9	110.2	15
BW 145 DH-5	92.5	71.7	48.4	68.9	110.2	15
BW 145 PDH-5	92.5	71.7	47.6	68.9	110.2	15
	L	O1	O2	S	W	
BW 145 D-5	179.1	2.6	2.6	0.79	66.5	
BW 145 DH-5	179.1	2.6	2.6	0.79	66.5	
BW 145 PDH-5	179.1	2.6	2.6	0.59	66.5	

Technical Data

BOMAG

BOMAG

BOMAG

BW 177 D-5

BW 177 DH-5

BW 177 PDH-5

Weights

Gross weight.....	lb	17,196
Operating weight CECE w. ROPS cabin.....	lb	14,551
Axle load, drum CECE.....	lb	8,819
Axle load, Wheels CECE.....	lb	5,732
Static linear load CECE.....	lb/in	132.9

18,078	16,755
14,771	15,322
8,929	9,480
5,842	5,842
134.5	

Dimensions

Working width.....	in	66.4
Track radius, inner.....	in	117.1

66.4	66.4
117.1	117.1

Driving Characteristics

Speed (1).....	mph	0 - 2.8
Speed (2).....	mph	0 - 3.4
Speed (3).....	mph	0 - 4.7
Speed (4).....	mph	0 - 6.5
Max gradeability wo/with vibr.....	%	49/46

0 - 10	0 - 10
61/58	61/58

Drive

Engine manufacturer.....		Kubota
Type.....		V3307 CR-T
Emission stage.....		TIER 4f
Exhaust gas aftertreatment.....		DOC+DPF
Cooling.....		water
Number of cylinders.....		4
Performance ISO 3046.....	hp	74.3
Performance SAE J 1995.....	hp	74.0
Speed.....	rpm	2,400
Fuel.....		Diesel
Electric equipment.....	V	12
Drive system.....		hydrost.
Drum driven.....		standard

Kubota	Kubota	Kubota
V3307 CR-T	V3307 CR-T	V3307 CR-T
TIER 4f	TIER 4f	TIER 4f
DOC+DPF	DOC+DPF	DOC+DPF
water	water	water
4	4	4
74.3	74.3	74.3
74.0	74.0	74.0
2,400	2,400	2,400
Diesel	Diesel	Diesel
12	12	12
hydrost.	hydrost.	hydrost.
standard	standard	standard

Drums and Tires

Tire size.....	14.9-24/8PR	14.9-24/8PR	14.9-24/8PR
----------------	-------------	-------------	-------------

Brakes

Service brake.....	hydrost.	hydrost.	hydrost.
Parking brake.....	hydromec.	hydromec.	hydromec.

Steering

Steering system.....	oscil. artic.	oscil. artic	oscil. artic
Steering method.....	hydrost.	hydrost.	hydrost.
Steering/oscillating angle+/-.....	deg	35/12	35/12

Exciter system

Drive system.....	hydrost.	hydrost.	hydrost.
Frequency (1).....	vpm	1,740	1,740
Frequency (2).....	vpm	1,920	1,920
Amplitude.....	in	0.075/0.032	0.069/0.032
Centrifugal force.....	lb	25,179/16,636	25,179/16,636
Centrifugal force.....	t	11.47/7.5	11.47/7.5

Capacities

Fuel.....	gal	29.1	29.1	29.1
-----------	-----	------	------	------

Technical modifications reserved. Machines may be shown with options.



Single Drum Rollers 5-15 Tons BW 211 D-5, BW 211 PD-5

Fields of application:


Heavy-duty compaction work on thick fill materials. D-series models are suited to the compaction of hydraulically bound material, sand, gravel, crushed rock, semi-cohesive soil and rockfill. PD models are well suited to heavy cohesive soils with high water content.

Standard Equipment

- ☒ BOMAG ECOMODE
- ☒ Self locking differential
- ☒ Rear axle with twin spring accumulator brakes
- ☒ Hydrostatic travel and vibration drive
- ☒ Hydrostatic articulated steering
- ☒ Articulated joint lock
- ☒ Seat with arm rest and adj. for position and height
- ☒ Battery disconnect switch
- ☒ Single lever control for travel and vibration
- ☒ Warning, information and operation displays with LCD
- ☒ Loading mode
- ☒ Emergency STOP
- ☒ Working lights front/rear
- ☒ Back-up alarm
- ☒ 2 Scrapers
- ☒ Warning horn

Optional Equipment

- ☐ ROPS/FOPS cabin with seat belts
 - Sliding window
- ☐ ROPS/FOPS with safety belt
- ☐ Rearview camera
- ☐ Air conditioning
- ☐ Radio (Bluetooth)
- ☐ Pre-start cabin heating
- ☐ Comfort package: Adjustable seat and adjustable steering column
- ☐ Rotary beacon
- ☐ Indicator and hazard lights
- ☐ BOMAG ECOSTOP
- ☐ ECONOMIZER
- ☐ TERRAMETER
- ☐ BOMAG TELEMATIC POWER
- ☐ Special painting
- ☐ Padfoot segment kit (D)
- ☐ Environmentally compliant hydraulic oil
- ☐ Measuring and machine data interface for third-party suppliers
- ☐ LED Working lights (Cabin)
- ☐ Reversing alarm buzzer with broadband audio

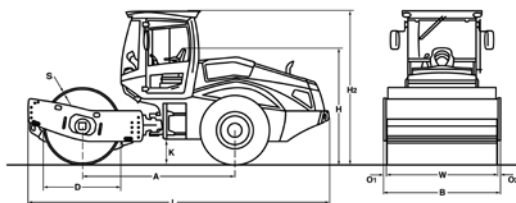

Dimensions in inches

	A	B	D	H	H2	K	L	O1	O2	S	W
BW 211 D-5	117.1	89.4	59.1	89.0	117.7	19.3	231.1	2.8	2.8	0.98	83.9
BW 211 PD-5	117.1	89.4	58.3	89.0	117.7	19.3	231.1	2.8	2.8	0.98	83.9

Technical Data

BOMAG

BW 211 D-5

BOMAG

BW 211 PD-5

Weights

Gross weight.....	lb	28,418	28,109
Operating weight CECE w. ROPS-cabin	lb	23,369	26,676
Axle load, drum CECE	lb	12,500	15,807
Axle load, wheels CECE	lb	10,869	10,869
Static linear load CECE.....	lb/in	149.1	—

Dimensions

Working width.....	in	83.9	83.9
Track radius, inner	in	144.9	144.9

Driving Characteristics

Speed (1).....	mph	0 - 3.1	0 - 3.1
Speed (2).....	mph	0 - 3.7	0 - 3.7
Speed (3).....	mph	0 - 5.0	0 - 5.0
Speed (4).....	mph	0 - 6.8	0 - 6.8
Max. gradeability without/with vibr.....	%	51/48	54/51

Drive

Engine manufacturer		Deutz	Deutz
Type		TCD 3.6L4	TCD 3.6L4
Emission stage		Stage V / TIER 4f	Stage V / TIER 4f
Exhaust gas aftertreatment.....		DOC+DPF+SCR	DOC+DPF+SCR
Cooling		liquid	liquid
Number of cylinders.....		4	4
Performance ISO 3046.....	hp	127.4	127.4
Performance SAE J 1995	hp	128.0	128.0
Speed	rpm	2,000	2,000
Fuel		Diesel	Diesel
Electric equipment.....	V	12	12
Drive system.....		hydrost.	hydrost.
Drum driven.....		standard	standard

Drums and Tires

Number of pad feet.....		—	150
Area of one pad foot	sq.in	—	21.2
Area of pad feet	in	—	3.9
Tire size.....		23.1-26 12PR	23.1-26 12PR

Brakes

Service brakes.....		hydrost.	hydrost.
Parking brake		hydromec.	hydromec.

Steering

Steering system.....		oscil. artic.	oscil. artic.
Steering method		hydrost.	hydrost.
Steering / oscillating angle +/-.....	deg	35/12	35/12

Exciter system

Drive system.....		hydrost.	hydrost.
Frequency.....	vpm	1,800/2,040	1,800/2,040
Amplitude	in	0.077/0.039	0.067/0.035
Centrifugal force	lb	53,954/35,520	64,071/43,613
Centrifugal force	t	27/17.8	32/21.8

Capacities

Fuel	gal	66.0	66.0
------------	-----	------	------

Technical modifications reserved. Machines may be shown with options.



Single Drum Rollers 5-15 Tons BW 211 DH-5, BW 211 PDH-5

Fields of application:


For medium to heavy-duty compaction work. D-series models are suited to the compaction of hydraulically bound material, sand, gravel, crushed rock, semi-cohesive soil and rockfill. PD models are well suited to heavy cohesive soils with high water content. H-series models have good climbing capabilities and powerful torque-drives.

Standard Equipment

- ☒ BOMAG ECOMODE
- ☒ Double pump system for travel drive
- ☒ Self locking differential
- ☒ Rear axle with twin spring accumulator brakes
- ☒ Hydrostatic travel and vibration drive
- ☒ Hydrostatic articulated steering
- ☒ Articulated joint lock
- ☒ Seat with arm rest and adj. for position and height
- ☒ Battery disconnect switch
- ☒ Single lever control for travel and vibration
- ☒ Warning, information and operation displays with LCD
- ☒ Loading mode
- ☒ Emergency STOP
- ☒ Working lights front / rear
- ☒ Back-up alarm
- ☒ 2 Scrapers
- ☒ Warning horn
- ☒ Tractor tires (PDH)

Optional Equipment

- ☐ ROPS/FOPS cabin with seat belts
 - Sliding window
- ☐ ROPS/FOPS with safety belt
- ☐ Rearview camera
- ☐ Air conditioning
- ☐ Radio (Bluetooth)
- ☐ Pre-start cabin heating
- ☐ Comfort package: Adjustable seat and adjustable steering column
- ☐ Rotary beacon
- ☐ Indicator and hazard lights
- ☐ BOMAG ECOSTOP
- ☐ ECONOMIZER
- ☐ TERRAMETER
- ☐ BOMAG TELEMATIC POWER
- ☐ Special painting
- ☐ Pad foot segment kit (DH)
- ☐ Environmentally compliant hydraulic oil
- ☐ Measuring and machine data interface for third-party suppliers
- ☐ Blade
- ☐ LED Working lights (Cabin)
- ☐ Reversing alarm buzzer with broadband audio

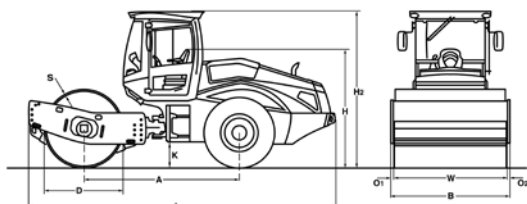

Dimensions in inches

	A	B	D	H	H2	K	L	O1	O2	S	W
BW 211 DH-5	117.1	89.4	59.1	89.0	117.7	19.3	231.1	2.8	2.8	0.98	83.9
BW 211 PDH-5	117.1	89.4	58.3	89.0	117.7	19.3	231.1	2.8	2.8	0.98	83.9

Technical Data

BOMAG

BW 211 DH-5

BOMAG

BW 211 PDH-5

Weights

Gross weight.....	lb	30,578	30,644
Operating weight CECE w. ROPS-cabin	lb	24,008	27,690
Axle load, drum CECE	lb	12,963	16,358
Axle load, wheels CECE.....	lb	11,054	11,332
Static linear load CECE.....	lb/in	154.6	—

Dimensions

Working width.....	in	83.9	83.9
Track radius, inner.....	in	144.9	144.9

Driving Characteristics

Speed.....	mph	0 - 7.5	0 - 7.5
Max. gradeability without/with vibr.....	%	60/58	62/60

Drive

Engine manufacturer	Deutz	Deutz
Type	TCD 3.6L4	TCD 3.6L4
Emission stage	Stage V / TIER 4f	Stage V / TIER 4f
Exhaust gas aftertreatment.....	DOC+DPF+SCR	DOC+DPF+SCR
Cooling	liquid	liquid
Number of cylinders.....	4	4
Performance ISO 3046.....	kW	95.0
Performance SAE J 1995	hp	128.0
Speed	rpm	2,000
Fuel	Diesel	Diesel
Electric equipment.....	V	12
Drive system.....	hydrost.	hydrost.
Drum driven.....	standard	standard

Drums and Tires

Number of pad feet.....		150
Area of one pad foot	sq.in	21.2
Area of pad feet	in	3.9
Tire size.....	23.1-26 12PR	23.1-26 12PR

Brakes

Service brakes.....	hydrost.	hydrost.
Parking brake	hydromec.	hydromec.

Steering

Steering system.....	oscil. artic.	oscil. artic.
Steering method	hydrost.	hydrost.
Steering / oscillating angle +/-.....	deg	35/12

Exciter system

Drive system.....	hydrost.	hydrost.
Frequency.....	vpm	1,800/2,040
Amplitude	in	0.075/0.039
Centrifugal force.....	lb	53,954/36,419

Capacities

Fuel	gal	66.0
------------	-----	------



Single Drum Rollers 5-15 Tons BW 211 D-5 SL

Fields of application:


Heavy-duty compaction work on thick fill materials. D-series models are suited to the compaction of hydraulically bound material, sand, gravel, crushed rock, semi-cohesive soil and rockfill.

Standard Equipment

- ☒ Self locking differential
- ☒ Rear axle with twin spring accumulator brakes
- ☒ Hydrostatic travel and vibration drive
- ☒ Hydrostatic articulated steering
- ☒ Articulated joint lock
- ☒ Battery disconnect switch
- ☒ Single lever control for travel and vibration
- ☒ Warning, information and operation displays with LCD
- ☒ Emergency STOP
- ☒ Back-up alarm
- ☒ 2 Scrapers
- ☒ Operator seat
- ☒ Warning horn

Optional Equipment

- ☐ ROPS/FOPS cabin with seat belts
- ☐ ROPS/FOPS with safety belt
- ☐ Air condition
- ☐ Rotary beacon
- ☐ Padfoot segment kit

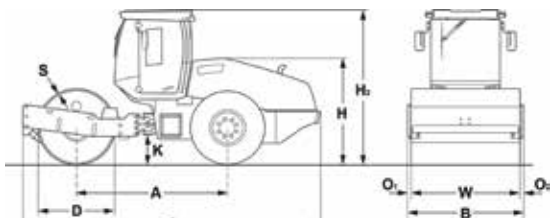

Dimensions in inches

	A	B	D	H	H2	K	L	O1	O2	S	W
BW 211 D-5 SL	117.1	89.0	59.1	88.2	120.2	20.9	231.1	2.6	2.6	0.98	83.9

Technical Data

BOMAG BW 211 D-5 SL

Weights

Gross weight.....	lb	29,300
Operating weight	lb	22,311
Operating weight CECE w. ROPS-cabin ..	lb	23,435
Axle load, drum CECE	lb	13,316
Axle load, wheels CECE.....	lb	10,119
Static linear load CECE.....	lb/in	158.8

Dimensions

Working width.....	in	83.9
Track radius, inner	in	144.8

Driving Characteristics

Speed (1).....	mph	0 - 3.7
Speed (2).....	mph	0 - 6.2
Max. gradeability without/with vibr.	%	45/43

Drive

Engine manufacturer		Cummins
Type		F3.8
Emission stage		Stage V / TIER 4
Cooling		water
Number of cylinders.....		4
Performance ISO 3046.....	hp	134.1
Performance SAE J 1995	hp	134.0
Speed.....	rpm	2,200
Fuel.....		Diesel
Electric equipment.....	V	12
Drive system.....		hydrost.
Drum driven.....		standard

Drums and Tires

Tire size.....	23.1-26/12PR
----------------	--------------

Brakes

Service brakes.....	hydrost.
Parking brake	hydromec.

Steering

Steering system.....	oscil. artic.
Steering method.....	hydrost.
Steering / oscillating angle +/-.....	deg 35/12.0

Exciter system

Drive system.....	hydrost.
Frequency (1).....	vpm 1,800.0/2,160.0
Amplitude	in 0.071/0.037
Centrifugal force	lb 53,055/38,218
Centrifugal force	t 5,418/3,889

Capacities

Fuel.....	gal 66.0
-----------	----------



Single Drum Rollers 5-15 Tons BW 213 D-5 SL

Fields of application:


Heavy-duty compaction work on thick fill materials. D-series models are suited to the compaction of hydraulically bound material, sand, gravel, crushed rock, semi-cohesive soil and rockfill.

Standard Equipment

- ☒ Self locking differential
- ☒ Rear axle with twin spring accumulator brakes
- ☒ Hydrostatic travel and vibration drive
- ☒ Hydrostatic articulated steering
- ☒ Articulated joint lock
- ☒ Battery disconnect switch
- ☒ Single lever control for travel and vibration
- ☒ Warning, information and operation displays with LCD
- ☒ Emergency STOP
- ☒ Back-up alarm
- ☒ 2 Scrapers
- ☒ Operator seat
- ☒ Warning horn

Optional Equipment

- ☐ ROPS/FOPS cabin with seat belts
- ☐ ROPS/FOPS with safety belt
- ☐ Air condition
- ☐ Rotary beacon
- ☐ Padfoot segment kit

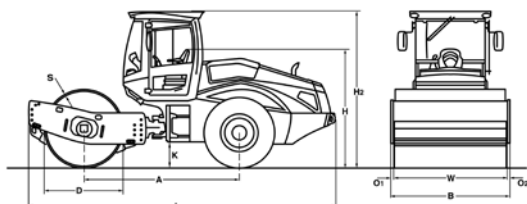

Dimensions in inches

	A	B	D	H	H2	K	L	O1	O2	S	W
BW 213 D-5 SL	117.1	89.4	59.1	89.0	117.7	19.3	231.1	2.8	2.8	0.98	83.9

Technical Data

BOMAG

BW 213 D-5 SL

Weights

Gross weight.....	lb	31,460
Operating weight CECE w. ROPS-cabin	lb	26,367
Axle load, drum CECE	lb	27,492
Axle load, wheels CECE.....	lb	17,373
Static linear load CECE.....	lb/in	207.2

Dimensions

Working width.....	in	83.9
Track radius, inner	in	144.8

Driving Characteristics

Speed (1).....	mph	0 - 3.7
Speed (2).....	mph	0 - 6.8
Max. gradeability without/with vibr.....	%	45/43

Drive

Engine manufacturer		Cummins
Type		F3.8
Emission stage		Stage V / TIER 4f
Cooling		liquid
Number of cylinders.....		4
Performance ISO 3046.....	hp	134.1
Performance SAE J 1995	hp	134.0
Speed	rpm	2,200
Fuel		Diesel
Electric equipment.....	V	12
Drive system.....		hydrost.
Drum driven.....		standard

Drums and Tires

Tire size.....		23.1-26 12PR
----------------	--	--------------

Brakes

Service brakes.....		hydrost.
Parking brake		hydromec.

Steering

Steering system.....		oscil. artic.
Steering method		hydrost.
Steering / oscillating angle +/-.....	deg	35/12

Exciter system

Drive system.....		hydrost.
Frequency.....	vpm	1,800/2,160
Amplitude	in	0.075/0.038
Centrifugal force.....	lb	61,823/45,411

Capacities

Fuel	gal	66.0
------------	-----	------

ECONOMIZER

The ECONOMIZER is a compaction measurement system that indicates compaction progress. During the compaction process, progress is indicated by the increase in the number of illuminated LEDs. If the number of LEDs remains constant, no more compaction can be achieved by these machines.

- Prevents unnecessary passes (no overcompaction)
- Saves time and fuel
- Identifies weak spots (no rework)
- Easy to understand (no calibration, no separate on switch)



ECONOMIZER available for all reversible vibratory plates < 300 kg and BMP 8500.

3-2-1 warranty as a standard



IF YOU OFFER HIGH QUALITY, YOU CAN ALSO GIVE EXTENSIVE WARRANTY COVERAGE!

Type	3 years of	2 years of	1 year
BT Tamper	Spring and guide unit	Combustion engine	Standard warranty
BP/BVP Single Direction Vibratory Plates	Exciter gears	Combustion engine	Standard warranty
BPR Reversible Vibratory Plates	Exciter gears + Hydraulic travel lever control	Combustion engine	Standard warranty
BW Hand-guided Vibratory Rollers	Exciter gears + coupling + Vibration drive	Combustion engine	Standard warranty
BMP Multipurpose Compactor	Exciter gears + Vibration motor/ -pump + Drum	Combustion engine	Standard warranty

Maintenance/Parts Service

Parts for maintenance, service and repair are available from our network of dealers and light equipment accounts.

- Protect your investment.
- Use genuine BOMAG spare parts to keep your machine in top condition and avoid unnecessary repairs.
- We support your equipment with prompt parts availability and faster delivery through our BOMAG dealers.

Notes on Performance Data

Soil Compaction

For the determination of the performance in earthwork the lift height of the compacted material is of utmost importance. The processed lift height depends mainly on soil type, compaction requirements and the compaction equipment used for the job. The reference values in the following tables are the results of compaction trials and practical applications under normal application related conditions. The required compaction values are thereby reached after for to eight passes.

The tables contain information on the volumetric output of the compaction equipment in earthwork.

Asphalt compaction

In asphalt compaction the number of required passes may vary extremely. It mainly depends on the compactibility of the mixture, the pre-compaction of the paver, the mixture temperature during compaction, the layer thickness as well as the characteristic data of the compactor.

The following table contain mean area and volumetric output data for the compaction equipment.

APPLICATION TIPS FOR PAVING WORKS

Guidelines* for the non-compacted/compacted layer thickness dependant on soil type and type of compaction equipment

Plastic mats		lb	in:				lb	lb	in:							
			2.5	3-4	> 5				2.5	3-4	> 5					
■ Natural stone (smooth or rough) ■ Concrete blocks and plates ■ Small to medium-sized surfaces	BWP 10XX - BP 12/40	≤1,212.5	✓	—	—	 ■ Concrete blocks ■ Smooth natural stone ■ Large surfaces ■ Non beveled stones ■ Sensitive surfaces	≤5,620	≤300.7	✓	—	—					
	BWP 18/45 - BP 25/50	>3,372	✓	—	—		≤5,620	≤300.7	✓	—	—					
	BPR 25/XX	≤5,620	✓	✓	—		≤5,620	≤300.7	—	✓	—					
	BPR 35/XX - BPR 40/60 D	≤7,868	✓	✓	—		≤7,868	≤507.0	—	✓	—					
	BPR 45/55 D - BPR 60/60 D	≤13,489	—	✓	✓		≤13,489	≤1,014.1	—	—	✓					
	BPR 70/70 D	>14,613	—	✓	✓		≤13,489	≤1,014.1	—	—	✓					

*These guidelines are the result of trial compaction and site operations. Compaction specifications can generally be achieved in four to eight passes under normal application conditions.





— unsuitable

✓ suitable

APPLICATION TIPS FOR EARTHWORKS AND ASPHALT

Guidelines* for the non-compacted/compacted layer thickness dependant on soil type and type of compaction equipment

 				lb		lb		Rock		Crushed stones		Gravel / Sand		Mixed soil		Silt / Clay	
BT 60 BT 65				≤3,372 3,597-3,822		< 1,367 1,367-187,4		-		12 → 10 12 → 10		18 → 14 20 → 16		14 → 12 14 → 12		12 → 10 12 → 10	
BVP 10/xx - BVP 18/45 BP 25/50				<4,496 ≥5,620		103,6-200,6 238,0-268,9		-		6 → 5		10 → 8 14 → 12		8 → 6		-	
BPR 25/XX BPR 35/XX BPR 45/55 DE, BPR 50/55 DE BPR 60/65 DE BPR 70/70 DE				≤5,620 ≤7,868 ≤11,240 ≤13,489 ≤15,737		≤330,7 ≤507,1 ≤881,8 ≤1,014,1 ≤1,322,8		6 → 5 8 → 6 10 → 8 12 → 10 16 → 14		14 → 12 14 → 12 16 → 14 20 → 16 22 → 18		12 → 10 12 → 10 14 → 12 18 → 14 20 → 16		12 → 10 12 → 10 14 → 12 18 → 14 20 → 10		8 → 6 8 → 6 12 → 10 12 → 10 14 → 12	
BW 55 E				2,248		≤374,8		-		-		10 → 8		10 → 8		-	
BW 65 H				4,946		≤1,763,7		-		5 → 4		10 → 8		10 → 8		5 → 4	
BMP 8500				16,186		≤3,306,9		-		14 → 12		18 → 14		16 → 14		11 → 12	

      			lb	lb	lb								
	BT 60, BT 65					3,147-3,821	4,946-8,992	0.8 - 1.6 in		4 - 5.5 in			
	BV/JP 10/35 - BP 20/50 BP 25/50 - BP 25/50 D					2,248-4,496 <5,620	103.6-240.3 >238.1	✓ ✓		- ✓ (3.9 in)			
	BPR 25/XX BPR 35/XX BPR 45/55 DE - BR70/70 DE					≤5,620 ≤7,868 10,116-15,736	<330.7 <661.4 859.8-1,322.8	✓ ✓ -		✓ (3.9 in) ✓ ✓			
	BW 55 E					2,248	330.7-1,102.3	✓		-			
	BW 65 H					4,946-8,992	1,433.0-2,425.1	✓		✓			

These guidelines are the result of trial compaction and site operations. Compaction specifications can generally be achieved

These guidelines are the result of trial compaction and site operations. Compaction specifications can generally be achieved in four to eight passes under normal application conditions.

✓ suitable

Notes

North American Head Office:

BOMAG Americas Inc.
125 Blue Granite Parkway
Ridgeway SC 29130
U.S.A.
Tel.: +1 803 337 0700
Fax: +1 803 337 0800
e-mail: usa@bomag.com

Global Head Office:

BOMAG
Hellerwald
56154 Boppard
GERMANY
Tel.: +49 6742 100-0
Fax: +49 6742 3090
e-mail: info@bomag.com

www.bomag.com/us-en

